


940nm Power Array VCSEL with power emission 1W -2W pulsed in a PLCC 2835 package

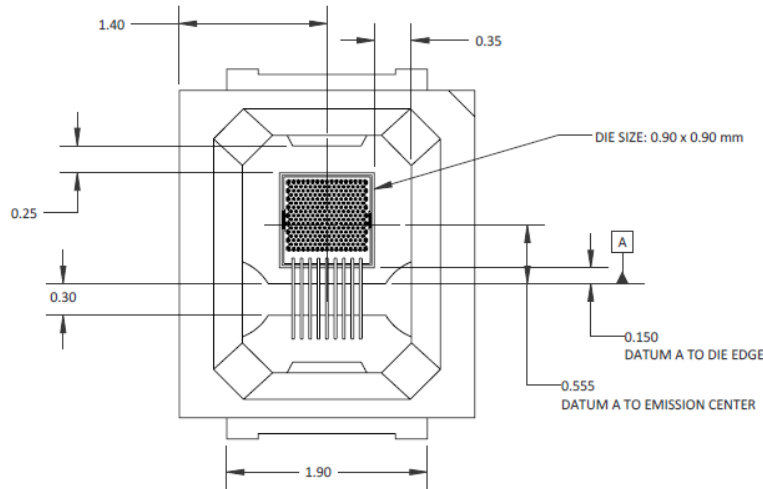

940PA on a PLCC 2835 package

Near Infra-Red Vertical Cavity Surface Emitting Laser (VCSEL)

Model: 940nm Multi Mode Array VCSEL

Applications

- Automotive Sensing
- 3D Scanning
- Motion Control
- Time of Flight
- Gesture Recognition
- IR illumination for Security

Package Details: This VCSEL array is delivered in a PLCC 2835 package (shipped in tape on reel for minimum quantities of 2000 pcs) with an encapsulant. The PLCC package is compatible with standard SMT solder reflow processing.



COMPLIES WITH IEC 60825-1, 2nd Edition 2007.
 COMPLIES WITH 21 CFR 1040.10 AND 1040-10.11 EXCEPT FOR DEVIATIONS PURSUANT TO LASER
 NOTICE NO.50 DATED 27 MAY 2001.



Absolute Maximum Ratings (Note 1)

Parameter	Rating	Notes
Storage temperature	-40 to 100 °C	
Operating temperature (VCSEL)	-20 to 60 °C	
Maximum package SMT solder reflow temperature	260°C, 10 seconds	
Maximum pulsed current	4.0 A	100µs pulse width, 10% duty cycle, T=25°C (Note 2)

Note 1: The maximum CW laser current in the Absolute Maximum Ratings is valid for the operating temperature noted at the table above. The maximum CW laser current decreases with increasing temperature. Contact Vixar for maximum CW laser current values at other temperatures.

Note 2: For details refer to the Vixar Application Note "Operation of VCSELs Under Pulsed Conditions". (<http://www.vixarinc.com/technology/applicationnotes.html>)

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated for extended periods of time may affect device reliability.

Electro-Optical Characteristics

VCSEL Operating Temp (Tv) =25°C,

Test condition: 100µs pulse width & 10% duty cycle


Operating current: 1.5Amps

Product ID			Minimum	Typical	Maximum	Notes
Parameter	Symbol	Units				
Threshold current	I _{th}	mA		150	250	
Operating voltage	V _f	Volts		2.0	2.4	
Optical Operating power	L _{op}	mW	850	1100	--	
Slope efficiency	SE	W/A	--	0.80	--	
Power conversion efficiency	PCE	%	35	39	--	
Reverse breakdown voltage		V	6	--	--	I _r ≤ 1nA
Beam divergence	1/e ²	deg	20	25	30	
Operating wavelength	λ _{op}	nm	930	940	950	
Rise time		ps	--	--	500	20%-80%
Fall time		ps	--	--	500	20%-80%




TYPICAL PERFORMANCE CURVES AT 25°C:

Sampled pulse data

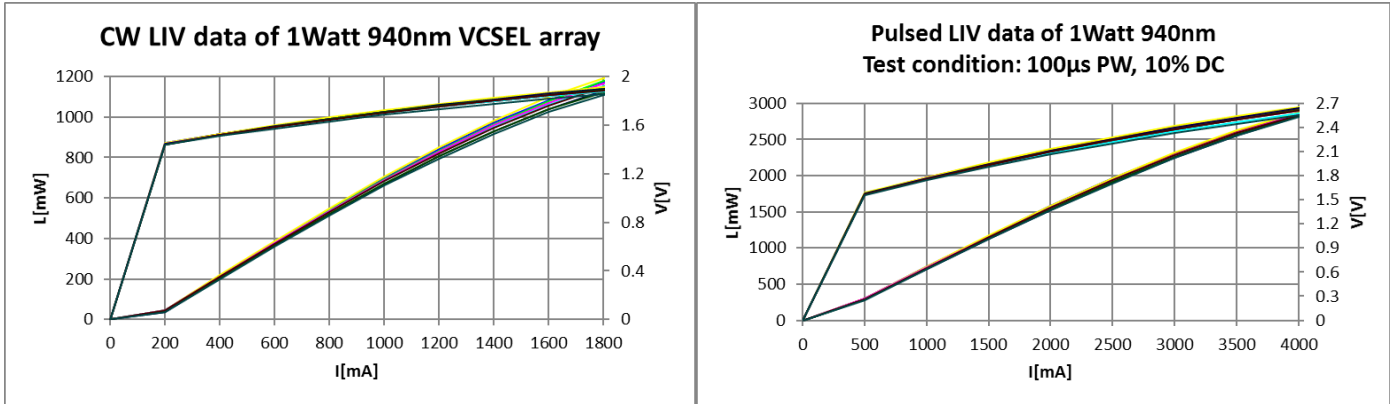

Beam divergence data over temp

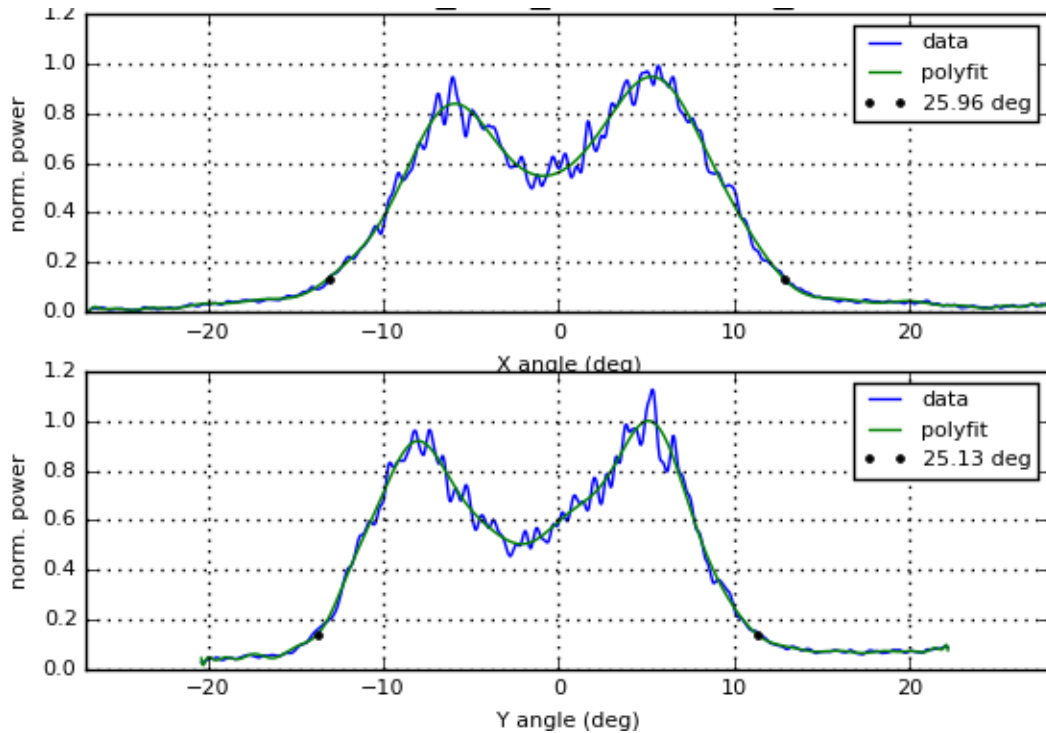



ORDERING INFORMATION

Description	Package	Part Number
1 Watt 940 nm Power array VCSEL on a PLCC package with encapsulant	PLCC 2835	I0-0940M-0000-KP04
1 Watt 940 nm Power array VCSEL bare die		I0-0940M-0000-AP04

2950 Xenium Lane, Suite 104
Plymouth, MN 55441
763-746-8045
email: info@vixarinc.com
website: www.vixarinc.com
Copyright ©VIXAR